
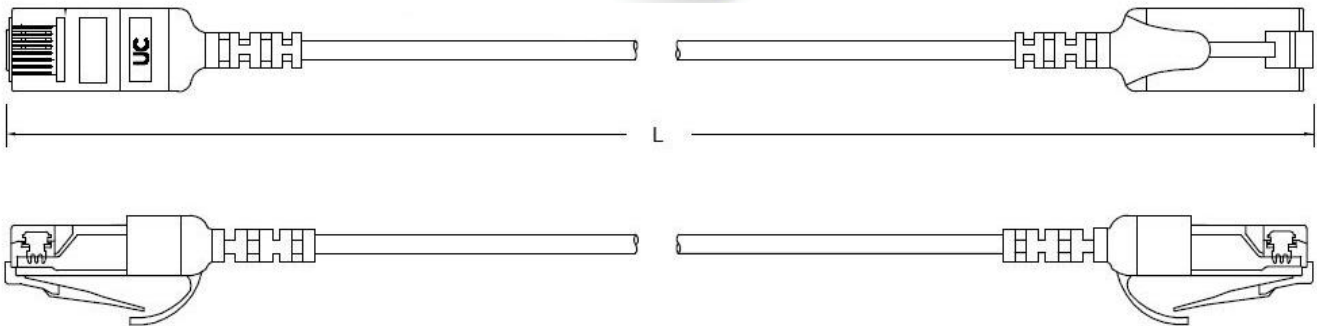


# UCCONNECT®

## UC Copper Patchcord SLIMFLEX

### Cat.6 SLIMFLEX U/UTP 28AWG 250 MHz, Stranded Copper Patchcord

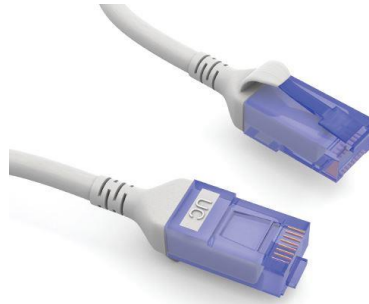

Stranded bare copper conductors insulated with thermoplastics polyolefin. Two insulated conductors twisted together to form a pair and four such pairs cabled to form the basic unit. Overall jacket with LSZH. Unique tight extrusion for up to 30% reduction in diameter.

### Specification

<b>Item</b>	
<b>Conductor</b>	
Size	28AWG
Type	Stranded bare copper
<b>Pairs</b>	
Color	Blue/White, Orange/White, Green/White, Brown/White
<b>Jacket</b>	
Type	LSZH
Overall Diameter	3.9 mm
Assembly	
RJ45 Modular Plug	50 u" gold plated contact
Termination Coding	TIA 568-B
Plug Housing	UL94V-0 rated clear polycarbonate

## UCCONNECT® UC Copper Patchcord SLIMFLEX

Boot	Unique boot design to prevent entanglement during re-insertions
Flame retardant	LSZH: IEC60332-1; IEC60754-1&2; IEC61034

### Cable Marking

**Draka UC CONNECT SFLEX Cat.6 U/UTP LSZH PS9671GY 4x2 28AWG EN 50288 ISO/IEC 11801  
 WW/YYYY <Batch Code> <FC>**

WW/YYYY: Week/Year  
 <Batch Code>: Factory defined tracking code  
 <FC>: Draka defined factory code  
 Marking color: Blue

### Ordering Information

The PN of the SLIMFLEX Cat.6 U/UTP LSZH are configured based on the table below:

PATCHCORD	PATCHCORD TYPE	COLOR	LENGTH
PS	XX	XX	- XX
	9671 – SLIMF Cat.6 U/UTP LSZH	GY – Grey	1 = 1m 0 = 1.5m 2 = 2m 5 = 5m 20 = 20m

Example of a SLIMFLEX copper patchcord part number:  
**PS9671GY-1**: SLIMFLEX copper patchcord Cat.6 U/UTP LSZH in 1 metre length and grey color

### Enquiries

Please contact our local sales office or [mms.asia@prysmiangroup.com](mailto:mms.asia@prysmiangroup.com)

Multimedia Solutions is the data communication portfolio of Prysmian Group and comprises all the necessary portfolio of cable solutions for data communication.

Ask about UC CONNECT for a complete Structure Cabling Solutions with 25 Years System Warranty.

Visit [www.DrakaUC.com](http://www.DrakaUC.com) for more information.

© PRYSMIAN GROUP 2017, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.