

UC9600 Ultra High Density MTP®/MPO Module



(Only for reference)

- Available in Duplex LC and Quad LC
- Available in G657A, OM3 and OM4
- Utilises bend-insensitive fibre
- Plug & Play Installation
- Quick release mechanism
- Available configuration with 3x8F, 2x12F, 1x24F, splice
- Type "P" is Draka UC defacto, Type A and B are available.
- Pre-terminate and 100% test from factory
- Utilised with UC9600 1U/2U/4U Patch Panel
- Available in splice version with pigtail


Standards

ANSI/TIA-568-C.3, ISO/IEC 11801, RoHS


General Specifications

Item	Description	
Module Housing Material	ABS	
Module Housing Colour	Black	
Front Adaptor	Duplex or Quad LC with dust cap	
Rear Adaptor	MTP®/MPO with dust cap	
LC Adaptor Colours	OM3: AQUA; OM4: VIOLET; SM: BLUE	
Assemblies	Pre_installed male MTP®/MPO to fanout LC assemblies inside module	
Performance	Insert Loss (MTP®/MPO+LC) 1x8F/1x12F/1x24F	Return Loss(per fiber)
SM	0.75dB(standard) 0.50dB(Low Loss)	55dB
MM	0.5dB(standard) 0.35dB(Low Loss)	26dB
Installation temperature	0°C to +60°C	
Operating Temperature	-20°C to +70°C	
Storage & Shipping Temperature	-40°C to +75°C	

Construction

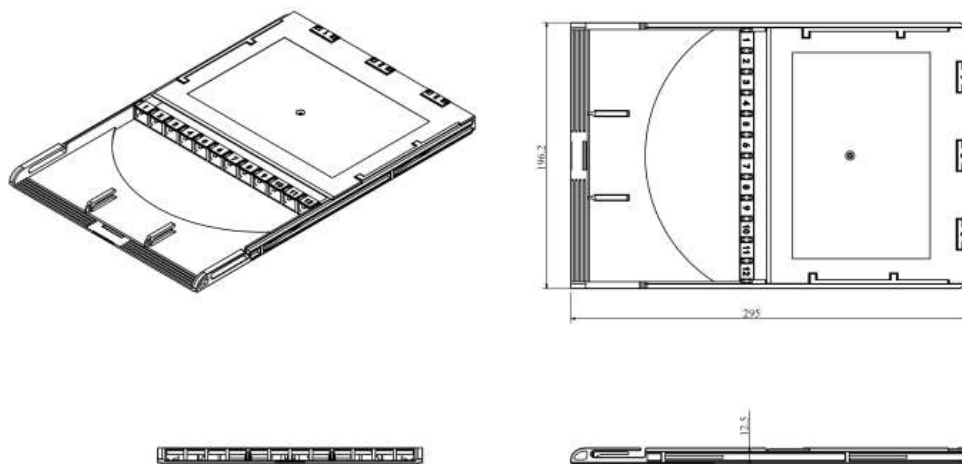


Ordering Information

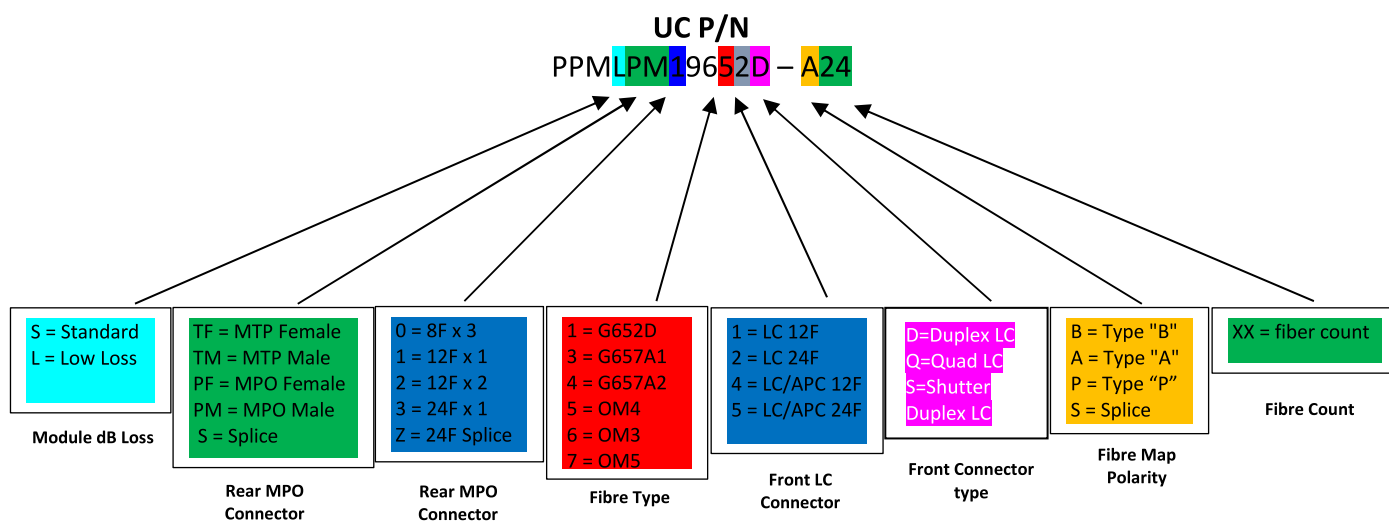


Remark: MPO/MTP-APC for SM, MPO/MTP-UPC for MM, LC-UPC as standard.

Type P mapping

10G MPO Channel **Type P MM**

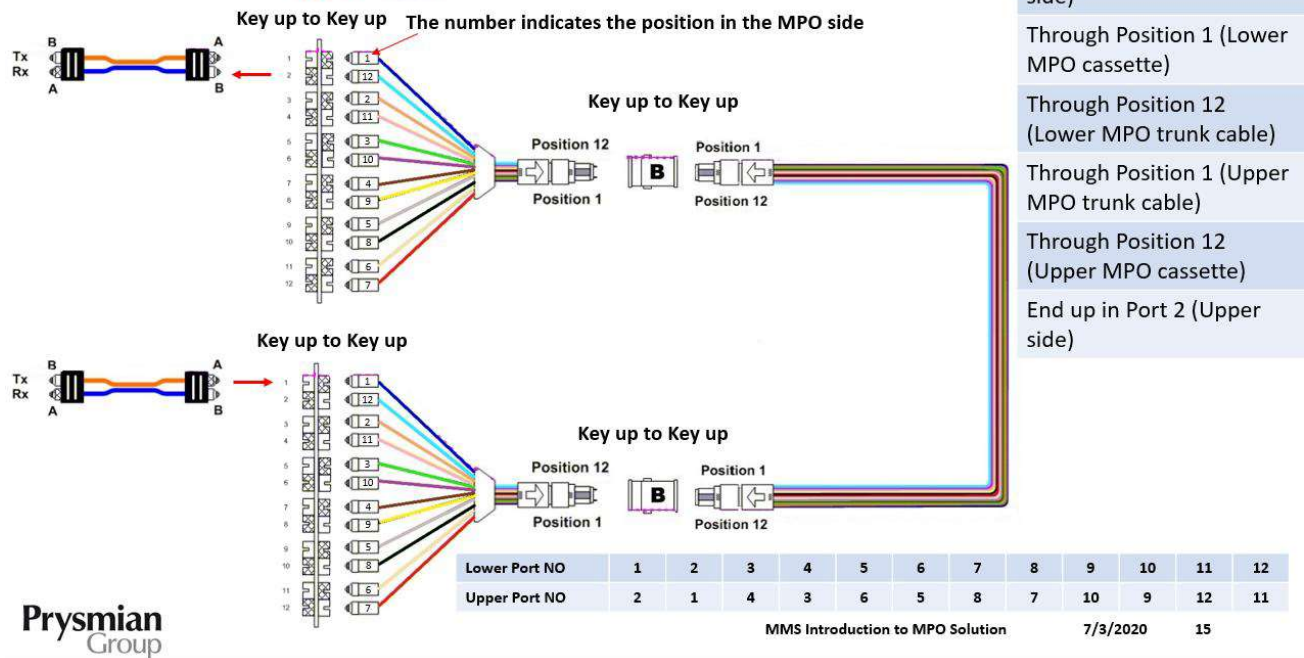


10G MPO Channel Type P SM Key Up

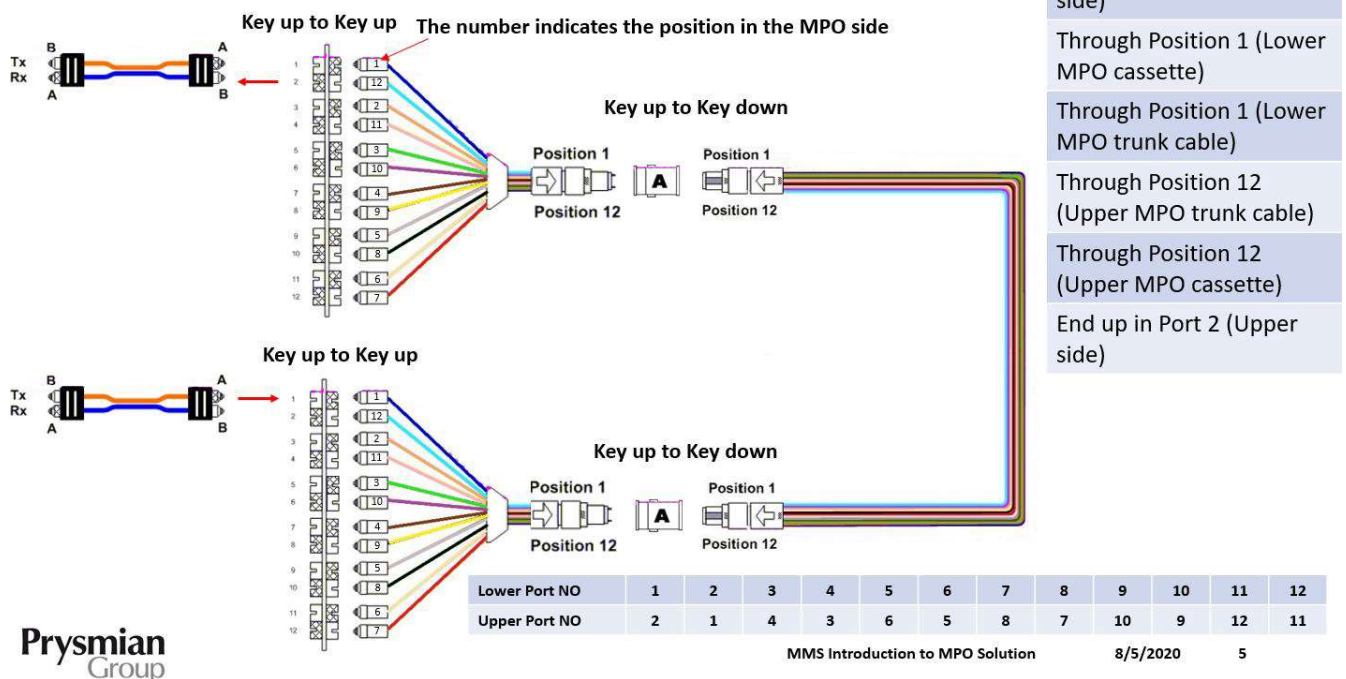

UC Part Number	SAP1C	Description	Weight (g)	Packaging
Type "A"				
PPMLPM39652D-A24	TBC	DRAKA UCCONNECT UC9600 Series UHD Low Loss 1xMPO/UPC- 24(M) to LC/UPC(D) Module MM OM4 Type A Violet	150	1 set / box
PPMLPM29662D-A24	TBC	DRAKA UCCONNECT UC9600 Series UHD Low Loss 2xMPO/UPC- 12(M) to LC/UPC(D) Module MM OM3 Type A Aqua	150	1 set / box
PPMLPM09642D-A24	TBC	DRAKA UCCONNECT UC9600 Series UHD Low Loss 3xMPO/APC- 8(M) to LC/UPC(D) Module SM G.657A2 Type A Blue	150	1 set / box
Type "B"				
PPMLPM39652D-B24	TBC	DRAKA UCCONNECT UC9600 Series UHD Low Loss 1xMPO/UPC- 24(M) to LC/UPC(D) Module MM OM4 Type B Violet	150	1 set / box
PPMLPM29662D-B24	TBC	DRAKA UCCONNECT UC9600 Series UHD Low Loss 2xMPO/UPC- 12(M) to LC/UPC(D) Module MM OM3 Type B Aqua	150	1 set / box
PPMLPM09642D-B24	TBC	DRAKA UCCONNECT UC9600 Series UHD Low Loss 3xMPO/APC- 8(M) to LC/UPC(D) Module SM G.657A2 Type B Blue	150	1 set / box
Type "P"				
PPMLPM39652D-P24	YMMBP03015	DRAKA UCCONNECT UC9600 Series UHD Low Loss 1xMPO/UPC- 24(M) to LC/UPC(D) Module MM OM4 Type P Violet	150	1 set / box
PPMLPM29662D-P24	YMMBP03014	DRAKA UCCONNECT UC9600 Series UHD Low Loss 2xMPO/UPC- 12(M) to LC/UPC(D) Module MM OM3 Type P Aqua	150	1 set / box
PPMLPM09642D-P24	TBC	DRAKA UCCONNECT UC9600 Series UHD Low Loss 3xMPO/APC- 8(M) to LC/UPC(D) Module SM G.657A2 Type P Blue	150	1 set / box
Splice				
PPMSSZ9632D-S24	YMMBP03016	DRAKA UCCONNECT UC9600 UHD Module Standard Splice LC/UPC 24F SM G657A1, Blue	120	1 set / box
PPMSSZ9632S-S24		DRAKA UCCONNECT UC9600 UHD Module Standard Splice Auto Shuttle LC/UPC 24F SM G657A1, Blue	120	1 set / box

PPMSSZ9652D-S24		DRAKA UCCONNECT UC9600 UHD Module Standard Splice LC/UPC 24F OM4, Violet	120	1 set / box
PPMSSZ9652S-S24		DRAKA UCCONNECT UC9600 UHD Module Standard Splice Auto Shuttle LC/UPC 24F OM4, Violet	120	1 set / box

Color Coding

Item		Color Coding				
		SM	SM/APC	OM1 & OM2	OM3	OM4
Adaptor	LC	Blue 	Green 	Beige 	Aqua 	Violet 
	MPO	Black 	Black 	Black 	Black 	Black 

Enquiries

Please contact our local sales office or email to: mms.asia@prysmiangroup.com

Multimedia Solutions is the data communication portfolio of Prysmian Group and comprises all the necessary portfolio of cable solutions for data communication.

Ask about UC CONNECT for a complete Structured Cabling Solutions with 25 Years System Warranty.

Visit www.drakauc.com for more information.

© PRYSMIAN GROUP 2022, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.