


UC 1RU Patch Panel 9515, Drawer type, Empty



- Light weight
- Fingerprint resistant
- Drawer for easy installation and maintenance
- Abrasion resistance
- Highly durable
- Easy fix-up to 4 module cassettes
- Easy fix-up to 4 adaptor panels
- Up to 96 fibres

(Only for reference)

Application

This patch panel are used to house and organize the trunk fiber optic cable, compatible with MPO-LC cassettes, fiber adaptor panels and patch cords. Sliding version has better easy access from front and rear, Panels has 4 slots, which can install 4 adaptor panels and 4 module cassettes, including LC adaptor, It is ideal for fast and reliable patch solutions within main, horizontal and equipment distribution areas.


General Specifications

Item	Description
Material	SPCC (Cold rolled steel plate)
Matrix	Thickness = 1.2 mm
Cover	Thickness = 1.2 mm
Dimension	H x W x D = 1RU x 482 mm x 361 mm
Weight	Approximate 4 kg (empty)
Surface Finishing	Powder coating





Construction

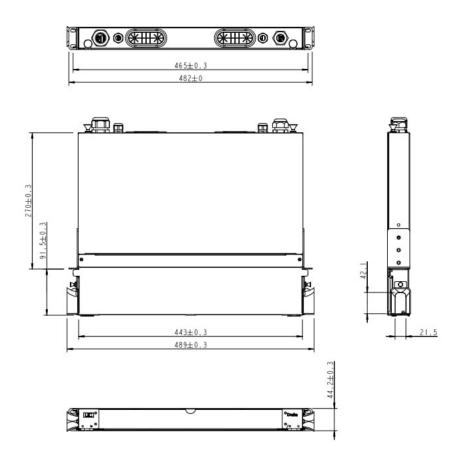

Ordering Information

UC Part Number	SAP1C	Description	Weight (g)	Packaging
PP9515	YPMBP02913	DRAKA UCCONNECT FIBRE OPTIC PATCH PANEL DRAWER TYPE 19" 1U 4 SLOT EMPTY BLACK UC9500 SERIES	4000	1 set / box



Draka

A Brand of Prysmian Group

Enquiries

Please contact our local sales office or email to: mms.asia@prysmiangroup.com

Multimedia Solutions is the data communication portfolio of Prysmian Group and comprises all the necessary portfolio of cable solutions for data communication.

Ask about UC CONNECT for a complete Structured Cabling Solutions with 25 Years System Warranty.

Visit www.drakauc.com for more information.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.




[©] PRYSMIAN GROUP 2022, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.



UC 6-Port Auto Shuttle LC Quadruplex Front Panel






(Only for reference)

- SPCC Steel (Cold rolled steel Plate), thickness
 1.2mm
- Fingerprint resistant
- Available in pre-assembled form
- Compatible with UC9515 Patch Panel
- Coupler Sleeve: Zirconia

Construction

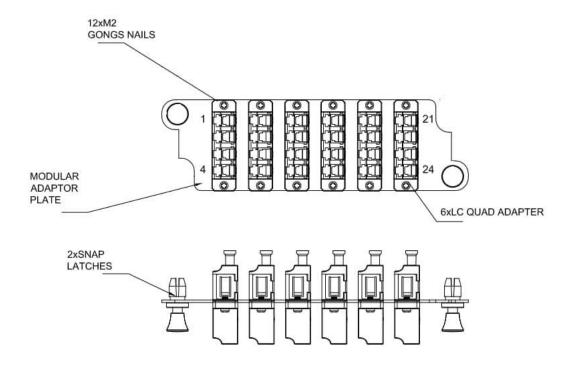





Ordering Information

UC	SAP1C	Description	Weight	Packaging
Part Number			(g)	
PPA9524-6LCSM	TBC	UC9500 1 Slot 6-Port LC Quadruplex Front	52	6 pcs per
		Panel with 6 SM Auto Shuttle Adaptors		box
PPA9524-6LCM4	TBC	UC9500 1 Slot 6-Port LC Quadruplex Front	52	6 pcs per
		Panel with 6 OM4 Auto Shuttle Adaptors		box

Enquiries

Please contact our local sales office or email to: mms.asia@prysmiangroup.com

Multimedia Solutions is the data communication portfolio of Prysmian Group and comprises all the necessary portfolio of cable solutions for data communication.

Ask about UC CONNECT for a complete Structured Cabling Solutions with 25 Years System Warranty.

Visit www.drakauc.com for more information.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.




[©] PRYSMIAN GROUP 2022, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.



UC 48F Splice Tray (Body + Cover)



- Stackable with detachable cover
- Compatible with UC9500 Series Patch Panel
- Light weight and highly durable
- Support up to 48 Fibre Splicing
- Supplied with small diameter splice protector tube

(Only for reference

Application

This splice tray is used to store the spliced fiber, with the suitable bend radius to protect the optical fiber without extra bend loss, splice tray is molded with high strength engineering plastic to have good mechanical protection.


General Specifications

Item	Description
Material – Cover	PVC
Material – Body	ABS
Dimension – Cover	219 mm x 89 mm x 19 mm
Color	Body – White, Cover - Transparent





Construction

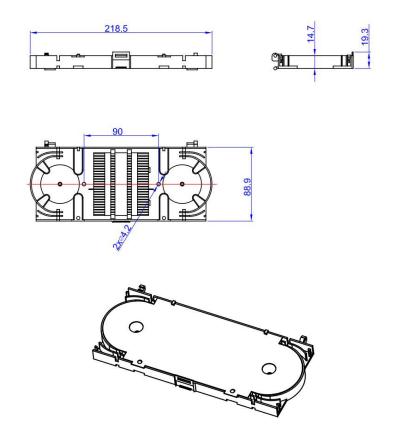

Ordering Information

UC Part Number	SAP1C	Description	Weight (g)	Packaging
PPST95-48	YFTBP03008	DRAKA UCCONNECT FIBRE SPLICE TRAY 48 FIBRE FOR UC9500 SERIES WHITE	40	1 pcs / bag
Related Products	5			
PP9515	YPMBP02913	DRAKA UCCONNECT FIBRE OPTIC PATCH PANEL DRAWER TYPE 19" 1U 4 SLOT EMPTY BLACK UC9500 SERIES	4000	1 set / box



Draka

A Brand of Prysmian Group

Enquiries

Please contact our local sales office or email to: mms.asia@prysmiangroup.com

Multimedia Solutions is the data communication portfolio of Prysmian Group and comprises all the necessary portfolio of cable solutions for data communication.

Ask about UC CONNECT for a complete Structured Cabling Solutions with 25 Years System Warranty.

Visit www.drakauc.com for more information.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.



[©] PRYSMIAN GROUP 2022, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.