


ICS IE ToughCat 7 MUD Protected S/FTP Installation Cable for tougher environments

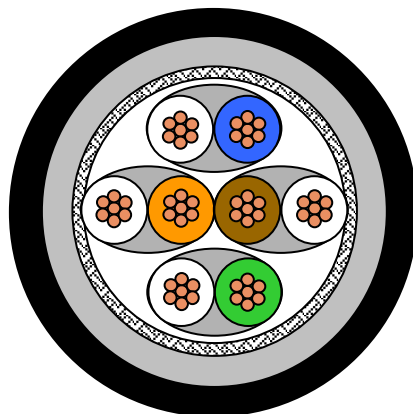

Application

Generic Data transmission. This cable is a **Cat7 S/FTP** cable is based on our **DNV certified ToughCat**, but with an additional fire retardant, halogen-free, low smoke MUD protecting UV-resistant outer jacket. This cable is meant for use as installation/horizontal cable in tougher electrical and mechanical environment, including ships and offshore units.

Standards

EN 50173-1; EN 50288-4-1
ISO/IEC 11801; IEC 61156-5
Power over Ethernet(PoE/PoE+)
Det Norske Veritas (DNV) specification No. 6-827.50-2

Fire rating

Inner sheath: LSHF-FR (SHF1) : IEC 60754-1; IEC 61034, IEC 60332-3-24
MUD protecting outer sheath : IEC 60754-1; IEC 61034, IEC 60332-3-24

Chemical resistance

Mineral oils IRM 902 (IEC60811-2-1) : - 7 days/100°C
Diesel - IRM 903 (IEC60811-2-1) : - 7 days/100°C

Certification

See above, under Application.

Construction

Conductor	Stranded copper wire Ø 0.27 mm ² , AWG23
Insulation	PE, Ø 1.6 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs
Pair screen	Al-laminated plastic foil around each pair
Overall screen	Copper braid, tinned Ø 6,6 mm
Inner sheath	Oil resistant, Fire retardant and halogen free LSHF-FR (SHF1).
Outer sheath	MUD protecting

ICS IE ToughCat 7 MUD Protected

Mechanical Properties

Bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	During operation	-40°C to + 85°C
	During installation	-15°C to + 50°C
Fire load	4 pair	(on request) MJ/km
Maximum tensile load	During operation	No load
	During installation	100 N

Electrical Properties

at 20°C

DC loop resistance		≤ 138 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 5000 MΩxkm
Capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair to ground)	≤ 1500 pF/km
Mean Characteristic impedance	@ 100 MHz)	100 ± 5 Ω
Nominal velocity of propagation		0,76c
Propagation delay		≤ 450 ns/100 m
Delay skew		≤ 15 ns/100 m
Transfer impedance	at 1 MHz	≤ 10 mΩ /m
	at 10 MHz	≤ 8 mΩ /m
	at 30 MHz	≤ 10 mΩ /m
Coupling attenuation		≥ 85 dB
Segregation classification	Acc. to EN 50174-2	"D"

Nominal Transmission characteristics

at 20°C

F (MHz)	Attenuation (dB/100m)	NEXT (dB)	ACR (dB/100m)	Return loss (dB)	PS-NEXT (dB)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)
1	2,0	90	88		87	85	85	82
4	3,6	90	86	27	87	83	85	82
10	5,5	90	84	30	87	81	79	76
16	7,5	90	82	30	87	79	75	72
20	7,7	90	82	30	87	79	73	70
31.25	9,8	90	80	30	87	77	69	66
62.50	14,0	86	72	30	83	69	63	60
100	17,9	83	65	30	80	62	59	56
155.00	22,4	81	59	26	78	55	57	54
200.00	25,6	78	52	25	75	49	53	50
250.00	28,8	77	48	25	74	45	51	48
300.00	31,6	73	41	23	70	38	47	44
600.00	45,7	71	25	20	68	22	44	41

ICS IE ToughCat 7 MUD Protected

Technical data

Part no.	Description	Colour	Outer diameter mm	Weight kg/km
1019269	ToughCat MUD C7 S/FTP 4Px0.27mm2	Grey RAL7024	10.1	112

*) on request

Product Code Table

Product Description	Product Code	PG Reference Code	PG Part Number
ToughCat MUD C7 S/FTP 4Px0.27mm2		60015692	60015692
ToughCat MUD C7 S/FTP 4Px0.27mm2 500DP	1019269-00500DP	60015692	60015695

© PRYSMIAN GROUP 2022, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.